


EZ Boss-Lock™ Notched Type C

B


The largest advantage of the Notched EZ Boss-Lock™ design is that the coupling can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. After inspection to determine its suitability for reuse, it can be reinstalled into another hose by using a new ferrule.



Coupler x Hose
Shank

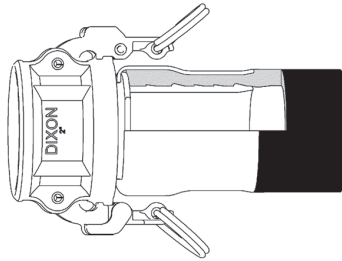

Swaged Assembly

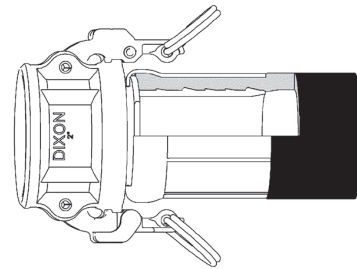

Crimped Assembly



Ferrule

Coupler x Hose Shank						
Size (mm)	Minimum Hose OD (mm)	Maximum Hose OD (mm)	Stainless Steel Part No.	Price \$	Stainless Steel Notched Ferrule Part No.	Price \$
40	49.21	55.56	RC150EZNO	242.07	GAS2334NO	66.47
40	52.39	59.53	RC150EZNO	242.07	GAS2370NO	81.81
50	62.71	68.26	RC200EZNO	222.27	GAS2709NO	56.25
50	67.47	72.23	RC200EZNO	222.27	GAS2885NO	224.97
75	88.11	94.46	RC300EZNO	295.93	GAS3760NO	86.93
75	94.85	97.63	RC300EZNO	295.93	GAS3885NO	86.93
100	117.48	120.25	RC400EZNO	387.58	GAS5010NO	197.01


Price Group: SD
AL03

Price Group: SD
AU03


EZ Boss-Lock™ Notched Type E



Adaptor x Hose
Shank



Swaged Assembly



Crimped Assembly



Ferrule

Adaptor x Hose Shank						
Size (mm)	Minimum Hose OD (mm)	Maximum Hose OD (mm)	Stainless Steel Part No.	Price \$	Stainless Steel Notched Ferrule Part No.	Price \$
40	49.21	55.56	RE150EZNO	89.67	GAS2334NO	66.47
40	52.39	59.53	RE150EZNO	89.67	GAS2370NO	81.81
50	62.71	68.26	RE200EZNO	98.35	GAS2709NO	56.25
50	67.47	72.23	RE200EZNO	98.35	GAS2885NO	224.97
75	88.11	94.46	RE300EZNO	267.19	GAS3760NO	86.93
75	94.85	97.63	RE300EZNO	267.19	GAS3885NO	86.93
100	117.48	120.25	RE400EZNO	449.73	GAS5010NO	197.01

Price Group: SD
AL03

Price Group: SD
AU03



- The Notched EZ Boss-Lock™ system allows you to better manage your inventories. You can stock one coupling and two ferrules, and thereby cover the same hose range with less inventory. *You must purchase a fitting and the matching ferrule to create an assembly.*
- Dixon™ stems and ferrules are specifically designed to be used together as a coupling system. *Due to differences in dimensions and tolerances, for safety reasons do not use other manufacturer's stems or ferrules with Dixon™ Holedall™ products.*
- Contact Dixon™ for swage and crimp recommendations.

For technical, application and material guidelines, please refer to page 82



1300 134 651
dixonvalve.com.au

All prices exclude GST.
ADPL718