


## Minsup™ Whipchecks



<b>Application:</b>	Crimped steel ferrules suitable for use in underground coal mines.
<b>Pressure:</b>	Max: 200 PSI WP for Air
<b>Features:</b>	<ul style="list-style-type: none"> <li>• Hose-to-hose</li> <li>• Eliminates injuries caused by broken air hose connections</li> <li>• Highly resistant to rust and corrosion</li> <li>• No tools needed - easy to install and remove</li> </ul>
<b>Wire Rope:</b>	G1570 FC Galvanised Steel
<b>Ferrules:</b>	Mild steel
<b>Spring:</b>	Zinc plated steel spring

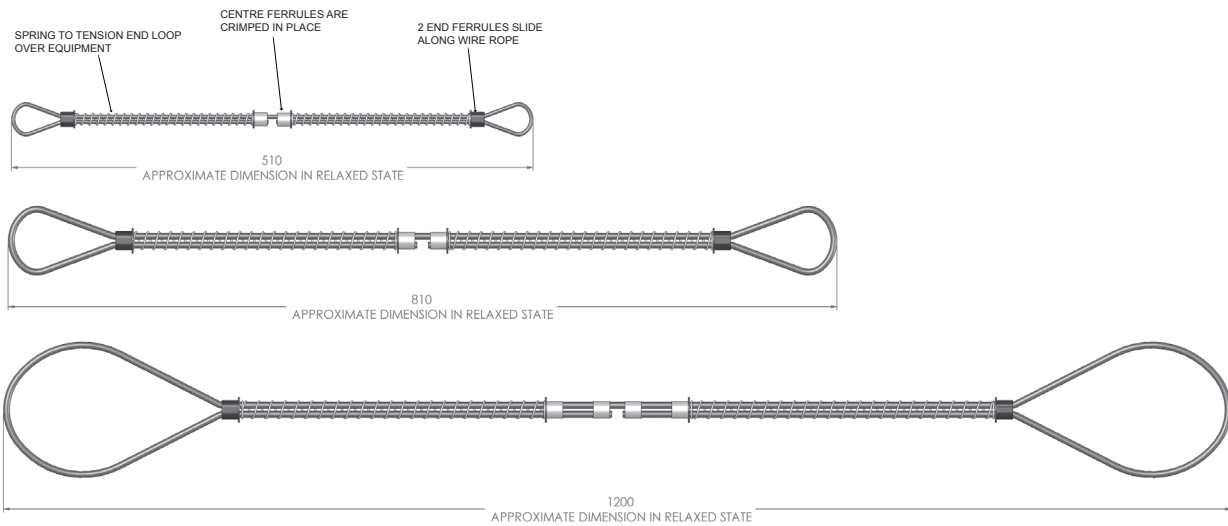

Cable	Cable Size (mm)	Hose ID (inch)	Part No.	Max Break Force (kN)	Length (mm)	Price \$ (ea)
Small	3.5	3/8 - 1/4	08/023/90/000	5.6	510	29.55
Medium	6	1/4 - 2	08/023/91/000	17.6	810	56.96
Large	6	2 1/2 - 4	08/023/92/000	17.6	1200	86.24

**Price Group: SD**  
AD03

