




The Right Connection®

Bayco Emergency Valve

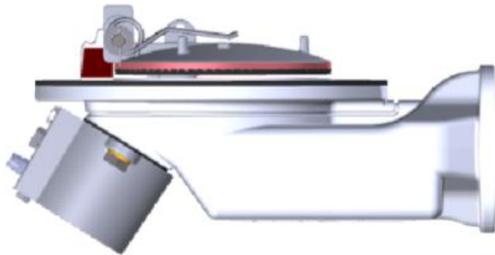

Emergency Foot Valves are installed in the floor of each tanker compartment and allow the inflow and discharge of fluid during the loading and unloading process of road tankers.

Dixon Bayco's *DBFVA0210* Emergency Valve features sequential air actuation for easy pneumatic circuit interlock integration and an integral shear groove an inward opening poppet, which is designed to retain tanker contents in the event of an incident.

Constructed in cast aluminium and easily removed for maintenance, the Dixon Bayco Emergency Valve features externally removable pneumatic ram and replaceable poppet with bonded seal which will not only provide years of service but also help reduce running costs over the lifetime of product ownership.

Including a manual override and top operable via Dixon's *DBLWKIT* Lift wire kit, the *DBFVA0210* features the same flange to flange dimensions of other commonly used brands of Emergency Valves found in Australia, hence it is designed to retrofit directly to existing flanges. Also available from Dixon are weld in companion tank and outlet flanges and Baylast™ to suit for both new tanker builds and complete refits.

As with other Dixon Bayco components the *DBFVA0210* is supplied with our proprietary Baylast™ seals which are suitable for use with all fuels found in the current market including ethanol and ethanol blends from E10 through E100, Bio-Diesels from B2 through B100 as well as regular unleaded and diesel fuels.



Dixon

1300 134 651

customerservice@dixonvalve.com.au

dixonvalve.com.au